

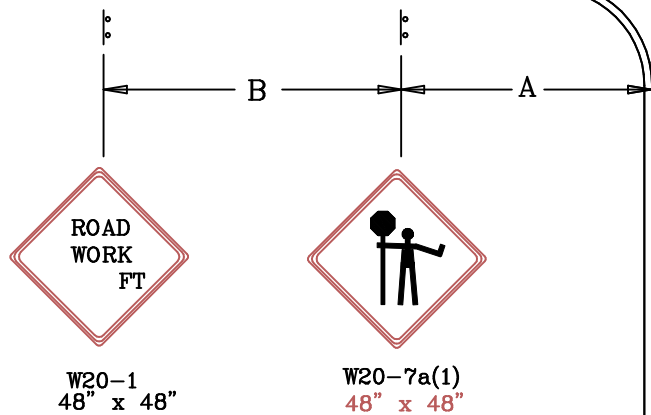


NOTE: ACCESS POINTS WITHIN LANE CLOSURE  
SHALL BE CONTROLLED BY FLAGGER(S)

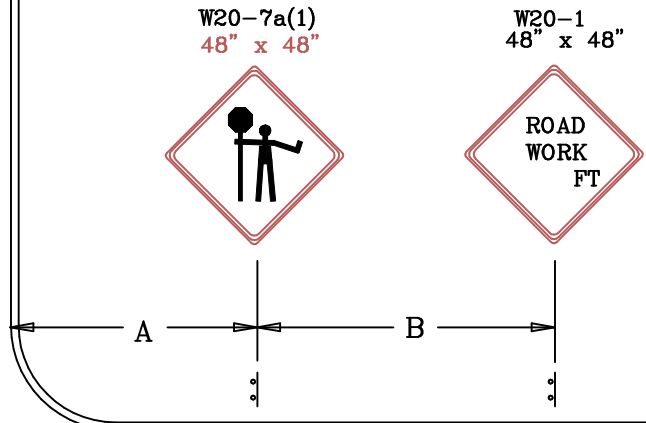

REFER TO TCP 100.01 FOR SIGN  
SPACING, TAPER LENGTHS AND  
BUFFER ZONE LENGTHS

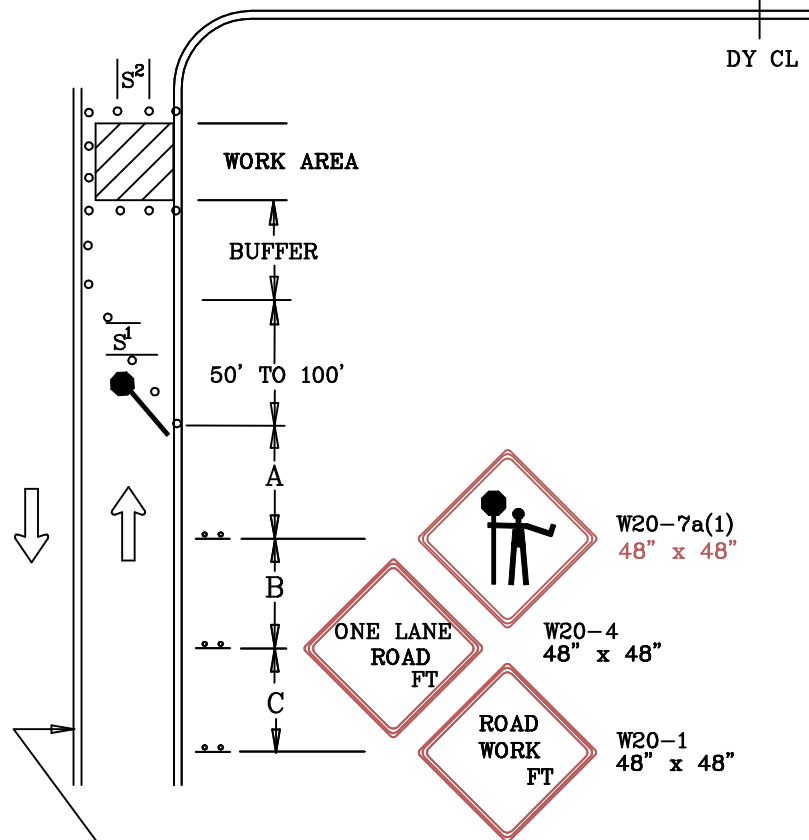

← DIRECTION OF TRAFFIC

.. SIGN

WORK SITE

FLAGGER

TRAFFIC DRUMS  
OR CONES

S<sup>1</sup>=30 FT.

S<sup>2</sup>=10 FT.

DY CL

REVISION BY	DATE	APPROVED

DATE	TRAFFIC OPERATIONS SECTION MONTGOMERY COUNTY, MARYLAND	
07-01-04		
DES. BY	FLAGGING CONTROL AT 4 - LEG INTERSECTION (2)	
MCDPWT		
DRAWN BY	APPROVED	
TCLE		
SCALE	_____ CHIEF, TRAFFIC OPERATIONS SECTION	
NTS	STANDARD TCP-105.02	___ OF ___ SHEETS

OF SHEETS